

Printhead: i3200-A1 Width: 650mm

LC-70 DTF Printer



LC-702 2H




LC-704 4H


Printing Speed

Mode Type	Draft	Production	Quality
LC-702	13.3 m ² /h	9 m ² /h	7 m ² /h
LC-704	30 m ² /h	24.5 m ² /h	19.9 m ² /h

Used together with a powder shaker and heat press machine

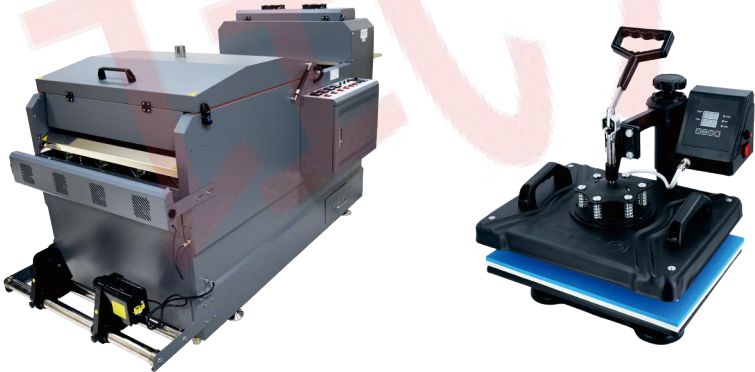

Production Process

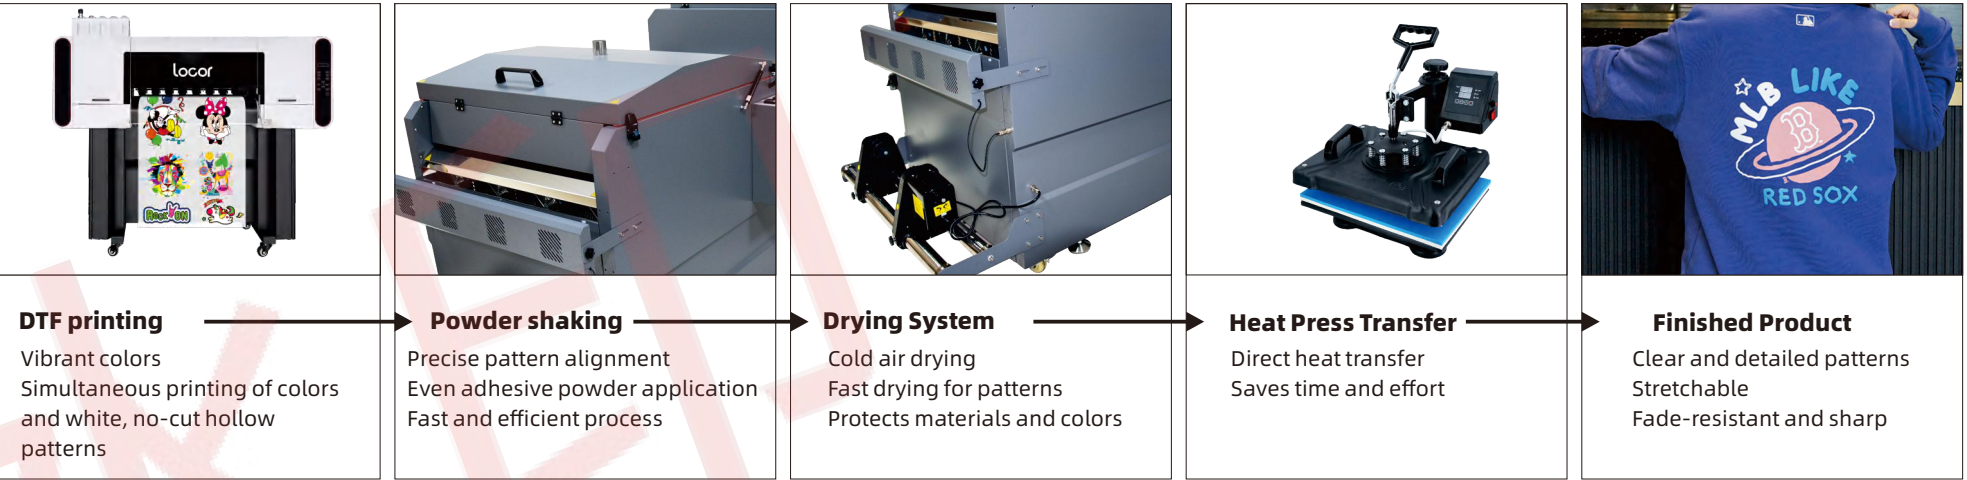

Product Technical Specifications

*Specifications and configurations are based on the actual product and may change without prior notice.

Product Model	LC-702	LC-704	Drying System	Powder Shaker Drying
Printhead Type	Epson i3200-A1/i1600-A1	Epson i3200-A1/i1600-A1	Operation Language	Chinese/English
Number of Printhead	2	4	Computer System	Win11/Win10
Printhead Height	1.5-2.5mm		Working Environment	Temperature range 18°C-25°C; Humidity range 35%-65% Rh
Printhead Cleaning	Fully automatic cleaning with anti-clogging, flash spraying, and automatic moisturizing functions		Printing Interface	Gigabit Ethernet Port
Ink Type	Pigment Ink		Compatibility	Supports LAN Printing
Ink Color	C/M/Y/K + W		RIP Software	Maintop/Photoprint/Wasatch
Ink Cartridge Capacity	1500ml per color		Power Parameters	AC-220V, 50Hz/60Hz
Ink Supply Method	Negative pressure continuous ink supply system		Power (W)	Standby power 64W, maximum power 1200W
Printing Width	650mm		Noise Level	Standby < 32dB, operating ≤65dB
Media	Heat Transfer PET Film		Machine Dimensions	1480mm x 560mm x 1365mm (L x W x H)
Maximum Roll Weight	< 40kg		Machine Weight	170 Kg
			Package Dimensions	1540mm x 750mm x 835mm (L x W x H)