

Easyjet 3200 Colossal Splendor Printer

Dual printhead, multiple models available. Width: 3200mm



Printing Speed


Type Mode	I3200-A1/E1	F1080-A1	F1440-A1
4 Pass	46m ² /h	33.8m ² /h	35.6m ² /h
6 Pass	31m ² /h	26m ² /h	26.7m ² /h
8 Pass	25.5m ² /h	19.6m ² /h	21.5m ² /h

Support for greyscale & VSDT


- The printhead releases three ink droplet sizes, with small droplets offset for color compensation, improving image detail.
- Customized print curves in printers can better restore the exquisite and smooth gradient effects, crisp text lines, and intricate details of patterns without compromising printing speed.



Variable droplet



Intelligent operation printing and high-quality mechanical design

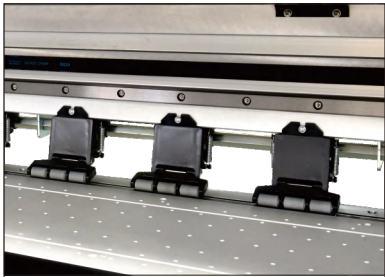

Guide Rails

High-quality guide rails ensure stable printhead movement, high precision, low noise, and long lifespan.




Control Panel

12-button operation panel, easy to learn, improves work efficiency.




Automatic Paper Sensor

Automatically pauses the printing task when the medium is about to run out.

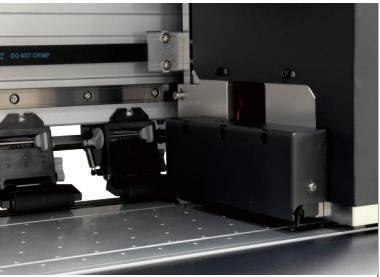

Anti-collision sensor

When the cart touches a foreign object, the switches will be on, and machine stops printing.

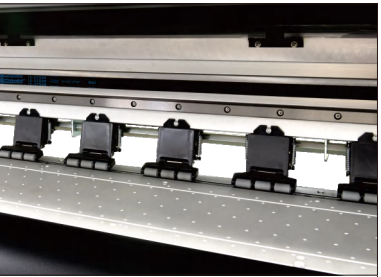

Machined Platform

Machined one-piece platform ensures high flatness, easy ink suction, and simple printhead cleaning for smooth printing.

Product Technical Specifications

*Specifications and configurations are based on the actual product and may change without prior notice.

Product Model	Easyjet 3202	Heating System	Three-Stage Embedded Constant Temperature Heating System (Front, Middle, Rear)
Number of Printhead	2	Drying Configuration	Dual infrared heating with external drying fan
Printhead Type	1080/3200/1600/DX5/DX7	Operation Language	Chinese/English
Printhead Height	2-3mm	Computer System	Win11/Win10/Win7
Printhead Cleaning	Fully automatic cleaning with anti-clogging, flash spraying, and automatic moisturizing functions	Working Environment	Temperature range 18°C-25°C; Humidity range 35%-65% Rh
Ink Type	Eco-Solvent / Water-Based / Sublimation Inks	Printing Interface	Gigabit Ethernet Port
Ink Color	4 colors (C/M/Y/K); 6 colors (C/M/Y/K/Lc/Lm); 8 colors (C/M/Y/K/Lc/Lm/Lk/LLk)	RIP Software	Maintop/Photoprint
Ink Cartridge Capacity	1500ml per color	Power Parameters	AC-220V, 50Hz/60Hz
Ink Supply Method	Negative pressure continuous ink supply system	Power (W)	min: 32W; max: 2300W
Printing Width	3200mm	Noise Level	Standby < 32dB, operating ≤65dB
Media	Photo Paper / PP Paper / Canvas / Rice Paper / Vehicle Vinyl Heat Transfer Paper, and More.	Machine Dimensions	4650 * 950 * 1750mm
Maximum Roll Weight	< 100 Kg	Machine Weight	0 Kg
Take-up Device	Standard Configuration	Package Dimensions	0 * 0 * 0mm (L * W * H)
		Package Weight	0 Kg