

Specification

Product Model	LC-703G
Printhead Type	Epson i3200-A1
Number of Printhead	3
Printhead Height	1.5-2.5mm
Printing Width	620mm
Ink Type	Pigment Ink
Ink Color	CMYK+White+Transparent Ink
Ink Tank Capacity	1500ml per color
Media	PET transfer Film
Ink Supply Method	Negative pressure continuous ink supply system
Printhead Cleaning	Fully automatic cleaning with anti-clogging, flash spraying, and automatic moisturizing functions
Unwind / Rewind System	Standard rear feeding and winding system
Drying System	Front Heater (individually controllable)
Operation Language	English / Chinese
Computer System	Win11/Win10
Working Environment	Temp 18~25°C, Humidity 35~65% RH
Printing Interface	Gigabit Ethernet or USB
RIP Software	Maintop / Photoprint (optional)
Power Parameters	AC-110 / 220V ± 10%, 50/60Hz, 5000W
Noise Level	Standby <32 dB, Operating ≤65 dB
Machine Dimensions	1400 × 1310 × 1400 mm (L × W × H)
Package Dimensions	1430 × 1350 × 1450 mm (L × W × H)

Specification do as present one, if there is a change without notice

Service hot line: 400 - 717 - 6789

Website: www.locor.com
Address: No.260 Hongsong road, High-tech zone, 450000 Zhengzhou city, china.

locor



GTF Series—3 Printheads

LC-703G

DTF Textile Printer

Printing Width: 600mm

ZHENGZHOU YUCAI ELECTRONICS TECHNOLOGY CO.,LTD.

Print head speed

- Printing speed using 3 printheads.

MAX Speed
4.7 m²/h



Four Core Advantages

Durability & Wash Fastness

- high-viscosity adhesive to boost wash fastness to over 40 cycles.

Less material waste

- No excess powder waste to manage or dispose of, which can lower material costs and environmental impact.

Improved safety and hygiene

- Reduces the risk of inhalation and skin irritation caused by adhesive powders, making it ideal for workplaces with strict hygiene requirements or for the production of healthcare-related apparel.

Upgraded Softness & Comfort

- The ultra-thin liquid adhesive eliminates the stiffness commonly found in traditional films. Precise on-demand inkjet technology ensures stunning pattern quality while delivering a significantly softer wearing experience.

Computer Configuration Requirement

- ▶ Win7/Win10/Win11 home 64 byte operation system
- ▶ CPU: Core i5 at least
- ▶ Memory: 6G at least
- ▶ Hard disk: 256G fast (7200 PRM)
- ▶ Network: Gigabit LAN
- ▶ Monitor: 17 inch flat panel display , true color display card , support resolution above 1024X768.




Higher precision at mechanical design




White Ink Mixer + Circulating Peristaltic Pump

Through dynamic sedimentation prevention via a mixer and constant-flow ink supply driven by a peristaltic pump, industrial-level production with high whiteness and zero ink interruption is achieved, unleashing the full potential of white ink performance.

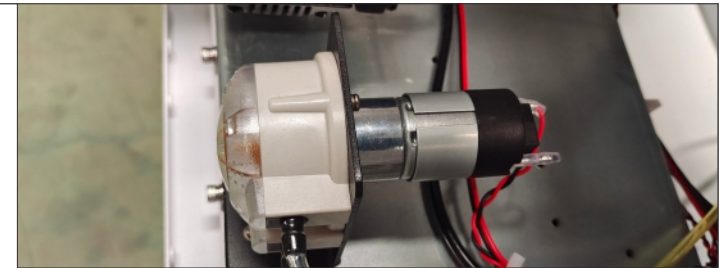

Heating Control

The front heater features zone-separated temperature control, enabling precise and rapid drying and curing for convenient take-up.

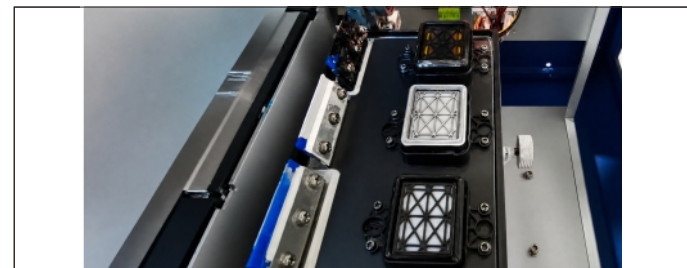

Intelligent Capping Station System

Precision lifting, directed drainage, and overflow guidance work in synergy to create a comprehensive printhead maintenance safeguard.

Application

